


IN. S.P.C. E ZONE, NAD 83  
NAME: 17031504  
N: 518706.8440(m)  
E: 55770.7740(m)

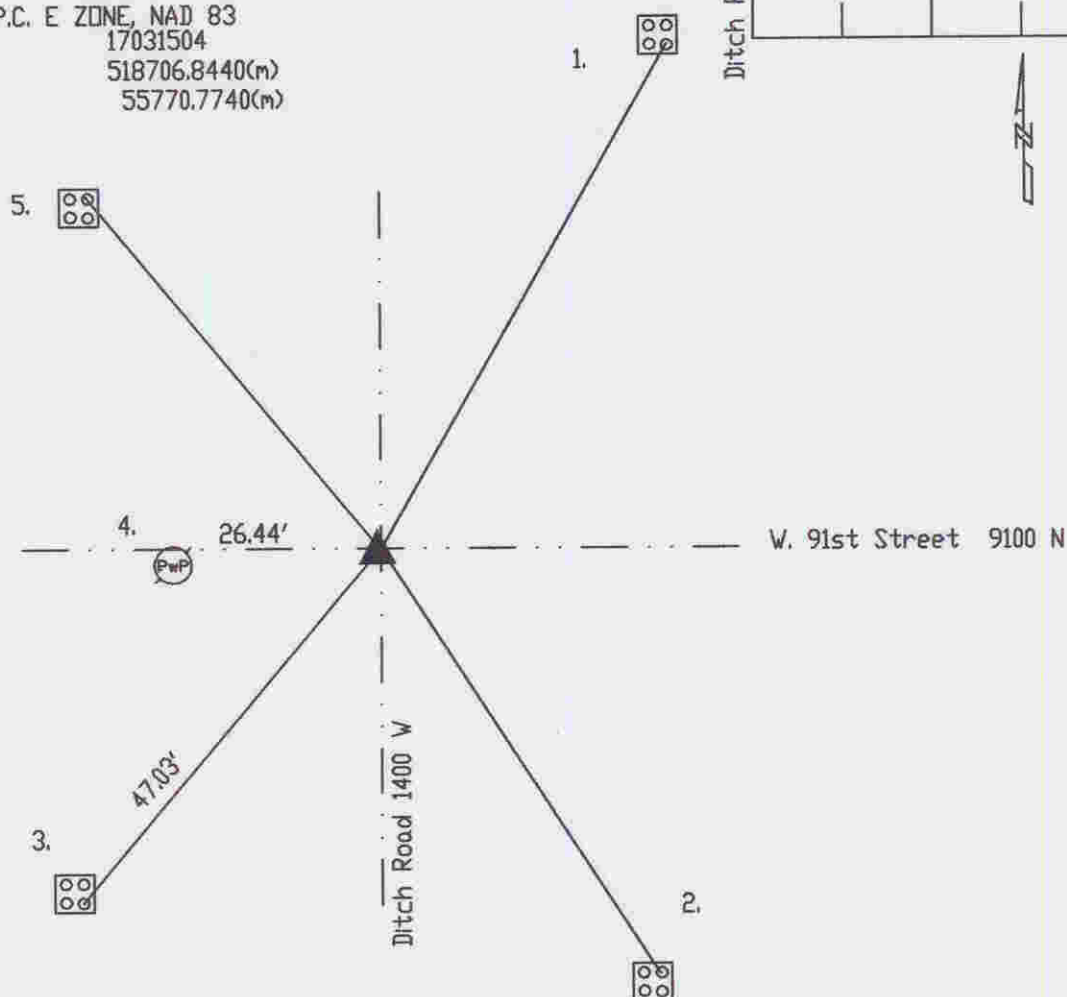

Original post set 1820 by Wm. B. Laughlin with witnesses: 12" beech N 21 E 26 links, 16" beech S 88 W 23 links per Marion County Atlas pg. 8. There is no reference to this corner in the Washington Township Legal Survey Book. 12-5-49 called for stone 1.5' down. 2-3-76 called for PK nail over stone. 11-18-87 excavated and found stone 36" down with 2 wooden hubs beside it, and Harrison was set. Re-tied 7-26-99 by Wilcoxon.

HC731504

REF.	DISTANCE	DESCRIPTION
1.	74.49'	Cut 'x' SE-bolt aluminum pole base
2.	59.88'	Cut 'x' NE-bolt aluminum pole base
3.	47.03'	Cut 'x' SE-bolt aluminum pole base
4.	26.44'	PK nail N PwP#113-203A 18'up
5.	50.38'	Cut 'x' NE-bolt aluminum pole base